

3-A-4-양-12

국외학술발표

Shape Grammar-Driven Bim Model  
Database for A Modular Building  
Design Recommender System  
- ICCEPM 2024 The 10<sup>th</sup> International  
Conference on Construction Engineering and  
Project Management -

2024.11.

과 제 명	인공지능 기반의 건축설계 자동화 기술개발		
주 관 기 관	경북대학교 산학협력단		
총 연구 기간	2021. 04 . 01 - 2025. 12 . 31(4년 9개월)		
해당연도(4차년)	2024. 01 . 01 - 2024. 12 . 31(1년)		
구 성 기 술 명	구성기술 3	설계 품질검토 자동화를 위한 지능형 설계서비스 보급·활용 기술개발	
세 부 과 제 명	3-A	지능형 설계적법성 평가 및 건축행정 서비스 지원 기술개발	
공 동 연 구 기 관	경희대학교 산학협력단, (주)코스펙이노랩		
연 구 기 관	경희대학교 산학협력단	연구책임자	김인한



# ICCEPM 2024

## The 10<sup>th</sup> International Conference on Construction Engineering and Project Management

*How innovative technology shapes sustainable built environment beyond limits for research and industry*




**29<sup>th</sup> July – 1<sup>st</sup> August 2024**

Conference Hall, Hokkaido University  
Sapporo, Hokkaido, Japan

Edited by Han Tian, Ph.D., Tamura Atsushi, Ph. D., Nagumo Yosuke, Ph. D. and Jung In Kim, Ph. D.

### Conference Sponsors and Supporting Organizations

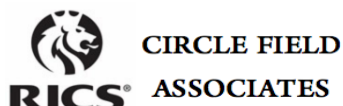

# ICCEPM2024 Sapporo

## TECHNICAL PROGRAM PROCEEDINGS

### ROOM1 (DAY2&DAY3)

SESSION CODE	SESSION THEME	SESSION CHAIR	ROOM	Theme	DAY	DATE	START	FINISH	Paper Number	Authors	Title
DAY2-SESSION1-ROOM1	1. Industrialized and Modular Construction	Sungbin Moon	ROOM1	1,3,8	DAY2	30-Jul-24	10:30	10:45	36	Sangmin Park, Maxwell Fordjour Ameh Abasi, Sanghyeok Han and Sungbin Moon	Classification and Improvement Directions for Mobile Crane Path Planning Algorithms: A Comprehensive Review
			ROOM1	1,4	DAY2	30-Jul-24	10:45	11:00	9	Zhengfu Zhu and Kazuya Shide	Construction Method Research Using Building Information Modeling: A Focus on the Precast Concrete Partitioning Method Leveraging Genetic Algorithms
			ROOM1	1,4	DAY2	30-Jul-24	11:00	11:15	201	Sadiq Ur Rahman and Ihtan Kim	Shape Grammar Driven BIM Model Database for a Modular Building Design Recommender System
			ROOM1	1,4	DAY2	30-Jul-24	11:15	11:30	202	Xu Chen, Wotou Duan, Guichen Zhu and Gang Wang	A framework of welding digital twin for steel structures
			ROOM1	2,10	DAY2	30-Jul-24	11:30	11:45	1	Kwanghyuk Im	IM (InterIndustry-Macro) Model on the Construction Sector
			ROOM1	2,10	DAY2	30-Jul-24	11:45	12:00	188	William Collinge	When sustainable technologies are ignored, socio-technical systems thinking, construction and sustainable development
			ROOM1	2,4,6	DAY2	30-Jul-24	12:00	12:15	67	Shing Li, Zhihao Ren, Yuanyuan Tian, Jang In Kim, Li Ma and Longyang Huang	Multi-objective optimization model for urban road maintenance planning using BIM, GIS, and DOE
DAY2-SESSION2-ROOM1	2. Sustainable Construction and Resilient Infrastructure/Cities/Communities	Manik Adhikari	ROOM1	2,3	DAY2	30-Jul-24	13:15	13:30	19	Manik Adhikari, Sung Bin Lee, Seong Wuk Kim, Hyeon-Jun Kim, Jermie Tuganahut, Sang-Guk Yum and Ji-Myoung Kim	Monitoring Roadbed Stability to Prevent Causing Hazards in Daeguon City, South Korea, Using Sentinel-1 SAR Data
			ROOM1	2,4,8	DAY2	30-Jul-24	13:30	13:45	38	Kiun Lee, Taeyong Kim and Sungbin Moon	Simulation of Urban Environments for Disaster Risk Management: Comprehensive Review of Techniques and Future Directions
			ROOM1	2,4,8	DAY2	30-Jul-24	13:45	14:00	43	Wonwoo Shin, Kyubyung Kang and Sungbin Moon	Enhancing Road Infrastructure Management: Pothole Detection Technology and Classification Standards
			ROOM1	2,7	DAY2	30-Jul-24	14:00	14:15	282	Yeim Jo, Sangki Lee, Jonghyuk Lee, Byounghan Seo, Dongsoo Kim, Yujin Seo, Dongwoo Kim and Won Choi	Nonlinear Finite Element Method for Local Buckling in Plastic Greenhouse
			ROOM1	3,4,7	DAY2	30-Jul-24	14:15	14:30	192	Thanh Loan Le and Sung-Ah Kim	Mixed-input neural networks for daylight prediction
			ROOM1	3,6	DAY2	30-Jul-24	14:30	14:45	50	Haneul Lee, Yeonghae Yun, Seokhae Yun and Youkyung Kim	The optimal method for imputing missing data in the preprocessing phase to enhance the performance of a CNN-based construction period prediction model
			ROOM1	3,4	DAY2	30-Jul-24	14:45	15:00	59	Shadi Alatharneh, Busra Yucel, Junshan Liu and Scott Kramer	A Comparative Analysis of Point Clouds Acquired from Terrestrial Laser Scanning, UAV Photogrammetry, UAV-based LiDAR, and 3D Virtual Tours in the Built Environment
DAY3-SESSION1-ROOM1	3. Sensing and Data Analytics for Construction (AI & Data Science)	Minkoo Kim	ROOM1	3,4	DAY3	31-Jul-24	10:30	10:45	69	Francis Xavier Duraimah, Samuel Olatunbosun, Joong-Hun Won and Minkoo Kim	Advancing Construction Safety Through a Combination of Immersive Technologies and Physiological Monitoring - A Systematic Review
			ROOM1	3,6	DAY3	31-Jul-24	10:45	11:00	149	Nasrullah Khan, Syed Fathan Alam Zaidi, Aqsa Sabir, Muhammad Sibtain Abbas, Rahat Hussain, Dongmin Lee and Chansik Park	DTR: A Unified Detection-Tracking-Re-identification Framework for Dynamic Worker Monitoring in Construction Sites
			ROOM1	3,6	DAY3	31-Jul-24	11:00	11:15	271	Jurhee Jung, Sechyeon Yang, Emmanuel Kimko, Doryeong Kim, Chansik Park and Dongmin Lee	Worker Customized Stress Monitoring through Body Composition Analysis and Wearable Bio-Sensor
			ROOM1	3,8	DAY3	31-Jul-24	11:15	11:30	182	Wei Yi Hou, Antun Pal, Jacob J. Lin and Sheng-Hsien Hsien	Real-time Construction Progress Monitoring Framework leveraging Generative SLAM
			ROOM1	4,12	DAY3	31-Jul-24	11:30	11:45	127	Mahmoud Soltani, Akseem Pechra, Rahat Hussain, Si Van Tien Tran, Aqsa Sabir, Doyeop Lee and Chansik Park	Enhancing Construction Jobsite Safety Training Through SAFEEducation: A Novel Approach Using Industry 4.0 Technologies
			ROOM1	2,8	DAY3	31-Jul-24	11:45	12:00	215	Chen Li, Ke Chen and Hanlin Li	Cross-Learning Enhanced Semi-Supervised Point Cloud Semantic Segmentation for Sewer Inspection
			ROOM1	3,12	DAY3	31-Jul-24	12:00	12:15	142	Syed Fathan Alam Zaidi, Muhammad Sibtain Abbas, Rahat Hussain, Aqsa Sabir, Nasrullah Khan, Jashun Yang and Chansik Park	Slate Chatbot: Natural Language Processing and Large Language Model driven Construction Safety Learning through OSHA Rules and Video Content Delivery
			ROOM1	3,6	DAY3	31-Jul-24	12:15	12:30	281	Byungho Yoo, Yunchul Woo, Jimoo Kim, Moonsoo Park and Changbum Ryan Ahn	Improving Explainability of Generative Pre-trained Transformer Model for Classification of Construction Accident Types: Validation of Saliency Visualization
			ROOM1	4,12	DAY3	31-Jul-24	13:15	13:30	133	Aqsa Sabir, Rahat Hussain, Syed Fathan Alam Zaidi, Muhammad Sibtain Abbas, Nasrullah Khan, Jashun Yang and Dr. Doyeop Lee	Integrating Conversational AI Based Serious Games to Enhance Problem-Solving Skills of Construction Students
			ROOM1	4,12	DAY3	31-Jul-24	13:30	13:45	135	Rahat Hussain, Aqsa Sabir, Muhammad Sibtain Abbas, Nasrullah Khan, Syed Fathan Alam Zaidi, Chansik Park and Doyeop Lee	Multi-agent Conversational AI System for Personalized Learning of Construction Knowledge
			ROOM1	4,12	DAY3	31-Jul-24	13:45	14:00	136	Rahat Hussain, Akseem Pechra, Mahmoud Soltani, Si Van Tien Tran, Syed Fathan Alam Zaidi, Chansik Park and Doyeop Lee	Enhancing Leadership Skills of Construction Students through Conversational AI Based Virtual Platform
			ROOM1	4,6	DAY3	31-Jul-24	14:00	14:15	96	Shuhan Yang, Ke Dai, Zhihao Ren, Jang In Kim, Bin Jiao, Dan Wang and Wooyoung Jung	Excavation schedule optimization for hardrock tunnels based on Q-learning
			ROOM1	4,6	DAY3	31-Jul-24	14:15	14:30	236	Thai-Hoa Le and Jacob J. Lin	An On-site and Off-site Collaborative Safety Monitoring Framework using Augmented and Virtual Reality for Near miss incidents
ROOM1	4,7	DAY3	31-Jul-24	14:30	14:45	141	Shuhe Tazawa, Yui Sato, Stephanie Bay, Yoko Nagayama and Jun Inoue	Improving Efficiency of University Campus Facility Management Using Digital Twin			
ROOM1	3,4	DAY3	31-Jul-24	14:45	15:00	151	Jinwu Xiao, Jashun Hu, Sungbin Moon and Kyubyung Kang	Reconstructing and Visualizing Construction Progress Using Neural Radiance Fields			
ROOM1	2,10	DAY3	31-Jul-24	15:00	15:15	287	Kwanghyuk Im	InterIndustry-Macro (IM) Model on the Construction Sector			
DAY3-SESSION2-ROOM1	4. Visualization, Information Modeling, and Simulation (Digital Twin, AR/VR, BIM)	Fathan Alam Zaidi/Chansik Park	ROOM1	4,12	DAY3	31-Jul-24	13:15	13:30	133	Aqsa Sabir, Rahat Hussain, Syed Fathan Alam Zaidi, Muhammad Sibtain Abbas, Nasrullah Khan, Jashun Yang and Dr. Doyeop Lee	Integrating Conversational AI Based Serious Games to Enhance Problem-Solving Skills of Construction Students
			ROOM1	4,12	DAY3	31-Jul-24	13:30	13:45	135	Rahat Hussain, Aqsa Sabir, Muhammad Sibtain Abbas, Nasrullah Khan, Syed Fathan Alam Zaidi, Chansik Park and Doyeop Lee	Multi-agent Conversational AI System for Personalized Learning of Construction Knowledge
			ROOM1	4,12	DAY3	31-Jul-24	13:45	14:00	136	Rahat Hussain, Akseem Pechra, Mahmoud Soltani, Si Van Tien Tran, Syed Fathan Alam Zaidi, Chansik Park and Doyeop Lee	Enhancing Leadership Skills of Construction Students through Conversational AI Based Virtual Platform
			ROOM1	4,6	DAY3	31-Jul-24	14:00	14:15	96	Shuhan Yang, Ke Dai, Zhihao Ren, Jang In Kim, Bin Jiao, Dan Wang and Wooyoung Jung	Excavation schedule optimization for hardrock tunnels based on Q-learning
			ROOM1	4,6	DAY3	31-Jul-24	14:15	14:30	236	Thai-Hoa Le and Jacob J. Lin	An On-site and Off-site Collaborative Safety Monitoring Framework using Augmented and Virtual Reality for Near miss incidents
			ROOM1	4,7	DAY3	31-Jul-24	14:30	14:45	141	Shuhe Tazawa, Yui Sato, Stephanie Bay, Yoko Nagayama and Jun Inoue	Improving Efficiency of University Campus Facility Management Using Digital Twin
			ROOM1	3,4	DAY3	31-Jul-24	14:45	15:00	151	Jinwu Xiao, Jashun Hu, Sungbin Moon and Kyubyung Kang	Reconstructing and Visualizing Construction Progress Using Neural Radiance Fields
DAY3-SESSION3-ROOM1	4. Visualization, Information Modeling, and Simulation (Digital Twin, AR/VR, BIM)	Christina Gross	ROOM1	4,8,11	DAY3	31-Jul-24	15:15	15:30	259	Changmin Pyo, Donghui Yoo and Jaiswoong Kim	Design of considering distortion after high energy manufacturing with Finite element analysis & Deep learning
			ROOM1	5,6	DAY3	31-Jul-24	15:30	15:45	46	Christina Gross, Philip Sander and Christian Trapp	A novel Approach to Risk Management for University Research Projects
			ROOM1	5,6,10	DAY3	31-Jul-24	15:45	16:00	35	Wonwoo Shin, Sanghyeok Han and Sungbin Moon	Advancing Defect Resolution in Construction: Integrating Fact Mining and Semantic Analysis for Deeper Customer Experiences
			ROOM1	5,10	DAY3	31-Jul-24	16:00	16:15	95	Jashun Park and Sungbin Moon	STRATEGIC FRAMEWORK FOR DIGITAL TRANSFORMATION IN ARCHITECTURE, ENGINEERING, AND CONSTRUCTION ORGANIZATIONS
			ROOM1	5,10,12	DAY3	31-Jul-24	16:15	16:30	247	Keito Sadaematsu	A Survey of the Structure of Construction Projects Using BIM - Focusing on Malaysia and Vietnam-
			ROOM1	2,11	DAY3	31-Jul-24	16:30	16:45	261	Jason Ting, Foo Wei Lee, Ming Kun Yew, Ren Jie Chen and Chun Chieh Yip	Particle Size Dependent Enhancement of Compressive Strength and Carbonation Efficiency in Steel Slag Cementitious Composites
			ROOM1	2,11	DAY3	31-Jul-24	16:45	17:00	262	Jason Ting, Foo Wei Lee, Ming Kun Yew, Kim Hung Mo and Yip Chun Chieh	STRUCTURAL PERFORMANCES OF RUBBERIZED CONCRETE WALL PANEL UTILIZING FIBER CEMENT BOARD AS SKIN LAYER.

## Table of Content

I.	INDUSTRIALIZED AND MODULAR CONSTRUCTION	1
	Construction Method Research Using Building Information Modeling: A Focus on The Precast Concrete Partitioning Method Leveraging Genetic Algorithms <i>Zhenglu Zhu and Kazuya Shide</i>	2
	A Basic Study on Comparative Analysis of The Characteristics and Performance of Different Types of Mechanical Rebar Coupler for Sustainable Built Environment <i>Jeeyoung Lim, Sunkuk Kim and Ayomi Dita Rarasati</i>	10
	Classification And Improvement Directions for Mobile Crane Path Planning Algorithms: A Comprehensive Review <i>Sangmin Park, Maxwell Fordjour Antwi-Afari, Sanghyeok Han and Sungkon Moon</i>	18
	Multi-Objective Permutation Flow Shop Scheduling in Precast Production Under Consideration of Embodied Carbon Emissions <i>Zhongfu Li and Ruiyan Zheng</i>	25
	Survey-Based User Perception Analysis for Off-Site Construction in Institutional Building <i>Chaeyeon Yu, Hojeong Jeong and Sungjin Kim</i>	33
	Measuring And Reducing the Embodied Carbon in High-Rise Buildings Through Innovative Modular Construction <i>Xiaohan Wu, Yue Teng, Geoffrey Qiping Shen and Jingke Hong</i>	41
	A Study on The Lower Shape of Double-Curved and Polygonal Free-Form Concrete Panel <i>Kyeongtae Jeong, Jongyoung Youn, Chaeyeon Yu and Donghoon Lee</i>	49
	Multi-Objective Production Scheduling of Precast Concrete Based on Reinforcement Learning <i>Leting Zu and Wenzhu Liao</i>	56
	Research On Risk Quantification of Pc Components Production Scheduling Based on DBR <i>Shuyan Ji, Yuechuan Wang and Yingmin Li</i>	63
	Shape Grammar-Driven Bim Model Database for A Modular Building Design Recommender System <i>Saddiq Ur Rehman and Inhan Kim</i>	70
	A Framework of Welding Digital Twin for Steel Structures <i>Ke Chen, Weixun Duan, Guichen Zhou and Gang Wang</i>	77
	A New Composite Wall Inner Tie System Applied in Reinforced Concrete Modular Integrated Construction <i>Xiaokang Zou, Jiang Huang, Wenjie Lu, Jun Shi, Zhen Zhao and Tian Shi</i>	85
II.	SUSTAINABLE CONSTRUCTION AND RESILIENT INFRASTRUCTURE/CITIES/COMMUNITIES	93
	Systematic Literature Review of Sustainable Construction Projects for Carbon Neutrality	94

# Shape Grammar-Driven BIM Model Database for a Modular Building Design Recommender System

Saddiq Ur REHMAN<sup>1,\*</sup>, Inhan KIM<sup>2,#</sup>

<sup>1</sup>*Department of Architecture, Graduate School of Kyung Hee University, Korea, E-mail address: [saddiqurrehman@khu.ac.kr](mailto:saddiqurrehman@khu.ac.kr)*

<sup>2</sup>*Department of Architecture, Graduate School of Kyung Hee University, Korea, E-mail address: [ihkim@khu.ac.kr](mailto:ihkim@khu.ac.kr)*

**Abstract:** The absence of standardized architectural design configurations poses significant challenges in stakeholder collaboration during the pre-design phase, particularly for modular buildings. Clients often lack comprehensive knowledge of potential design configurations for their proposed buildings, leading to dissatisfaction upon project completion. This issue is exacerbated in office buildings where floor plan layouts are uncertain due to diverse employee needs. To address these challenges, this research introduces a BIM-based dataset for modular office buildings using shape grammar principles. The research manipulates the location of core modules (including staircases, elevator shafts, and entrances) based on shape grammar principles, resulting in twenty unique configurations that provide standardized options for BIM model development. The initial phase involves developing a naming convention based on shape grammar principles to determine the core module locations. Using this convention, BIM models for modular office buildings are created, forming a database connected to the frontend and backend of a recommender system. This system recommends three different design options to clients based on their specific needs, fostering improved collaboration in the pre-design phase by involving clients directly. The user interface of the recommender system aids clients in understanding potential office building configurations, thereby enhancing collaboration and decision-making. Through the amalgamation of shape grammar principles and BIM technology, this proposed system offers a promising approach to advancing efficiency and precision in architectural design communication and representation.

**Key words:** Architectural Design, BIM (Building information Modeling), Modular building, Shape Grammar, Naming Convention.

## 1. INTRODUCTION AND BACKGROUND

The Architecture, Engineering, and Construction (AEC) industry's complexity and collaborative requirements underscore the need for cohesive teamwork among clients, architects, engineers, and construction professionals. This intricate nature of collaboration introduces various challenges in project design and construction [1], including issues such as ineffective communication, divergent stakeholder priorities, and difficulties in information management [2]. These challenges can impede the collaborative efforts of clients and project teams. For instance, representing building designs accurately and comprehensively presents two major challenges: handling heterogeneous data sources from architecture, engineering, and interior design, and addressing the dynamic evolution of designs to meet the client's evolving needs. Efficient communication is essential for achieving clear project understanding, fostering collaboration, facilitating effective problem-solving, and ultimately achieving successful architectural outcomes [3]. Effectively communicating the floor plan layout configuration to the client is a paramount element in design collaboration during the initial design phase. For instance,

in modular construction, where the design is tailored for both manufacturing and assembly phases, accurate communication of the initial design and building layout to the client is crucial. Failure to do so may lead to design modifications that significantly impact on the manufacturing phase, potentially causing project delays or cost escalations. Most often, architects design the floor plan layout based on their expertise in the field, anticipating minimal changes from the client on some occasions. However, diverse clients with varied needs, and different project types, such as offices and residential buildings, exhibit distinct layout requirements. When it comes to core modules and entrances in modular office buildings, the design must be flexible and customizable, comfortable, durable, aesthetically-pleasing, sustainable, and accessible. The use of modular designs in the office offers unique spaces and features that can adjust to meet the changing dynamics of the workplace.

BIM significantly streamlines design processes by serving as a centralized repository for project information, promoting collaboration, and enabling design analysis and optimization [4]. Developing a BIM based framework can improve design configuration efficiency, communication, and collaboration. However, BIM alone cannot address the client needs for floor plan configuration. To address these issues, a framework or a system that provides a structured representation of office building design details is required. Integrating BIM with shape grammar to create a system that represents the configuration of floor plans can improve communication and make it easier to address client needs in the plans in a seamless manner. Integrating BIM with information technology can further improve the collaboration among project stakeholders [5,6]. However, this process model of enhancing project productivity through effective communication is yet to be studied. A predefined and agreed-upon BIM based naming convention and standard is a condition without which the project could not succeed [7,8]. Applying these standards to directories, files, parameters, and any element shared among the stakeholders will guarantee fewer misunderstandings and errors when exchanging data.

Shape grammar, developed by Stiny and Gips [9], serves as a computational formalism for generating geometric shapes. Functioning as a design generation method, shape grammar executes rules to create designs, offering an efficient approach for automation in architectural design. In architecture, it is a method that generates architectural shapes and spatial configurations using predefined rules and operations, extensively researched, and applied in various projects [10]. For instance, GPLAN, a software dedicated to constructing dimensioned floorplan layouts, utilizes graph-theoretical and optimization techniques [11]. It takes user requirements in two forms: Adjacency graph and Dimensionless layout. GPLAN then generates dimensioned floorplans based on the provided adjacencies. In the realm of BIM, this approach suggests that each distinct floor plan layout, defined by a specific set of shape rules, could be assigned a unique identifier. Such an identification system would facilitate easier referencing, tracking, and modification of floor plans within a BIM system. However, it is essential to recognize that implementing such a system demands careful consideration of factors like the complexity of the shape rules, the diversity of potential floor plan layouts, and the system's flexibility and adaptability to changes in design requirements. Furthermore, the integration of shape grammar with visual coding [12] and reinforcement learning [13] has been employed to create diverse configurations for floor plan layouts. Additionally, it is noteworthy that research has explored real-time procedural generation of building floor plans [14]. This involves developing algorithms capable of generating floor plans resembling those created by architects, with potential for further refinement and adjustment. Integration of such algorithms into a BIM system could automate the assignment of unique identifiers to each generated floor plan.

This paper aims to create a modular office building dataset for an office recommender system, featuring diverse configurations to enhance communication with clients during the initial design phase. The research scope encompasses the adoption of shape grammar principles for floor plan layout development, the creation of a BIM model dataset, and its integration into the recommender system. This article is structured as follows: Section 2 outlines the methodology which covers the development of the naming conventions, and its application in BIM, Section 3 depicts BIM dataset integration into a recommender system and finally, Section 6 presents the conclusion and provide few future recommendations.

## **2. RESEARCH DESIGN AND EXECUTION**

Figure 1 illustrates the research methodology employed to establish a BIM database based on shape grammar principles for recommender system. The subsequent sections will provide a concise elaboration on how this methodology has been implemented to fulfill the objectives of this paper.

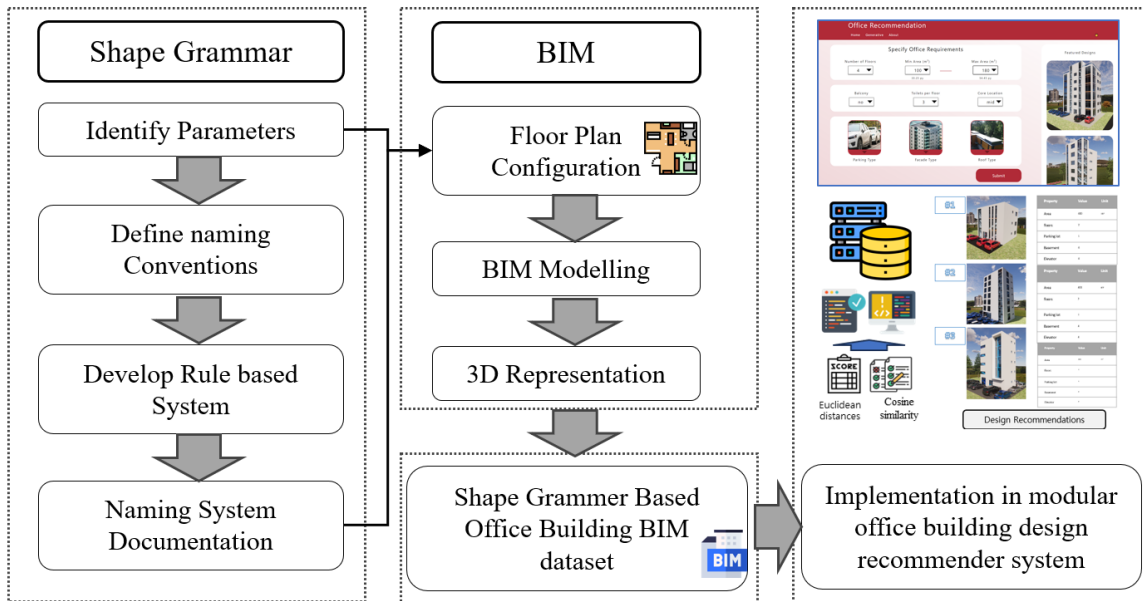


Fig. 1 Research Flow chart

## 2.1 Systematic naming convention development

The naming convention developed for modular office buildings comprises various modules to formulate both individual floor plans and the entire model. Specifically, modules containing stairs and an elevator are identified as core modules. The location of these core modules, along with the main entrance to the building, serves as parameters for the application of shape grammar principles, resulting in unique configurations. The initial assumption is a rectangular layout for the building, as illustrated in Figure 2. The shape grammar principles used in the floor plan layout configuration are 1) Symmetry and Asymmetry, 2) Proximity and Accessibility, 3) Orientation and view, 4) Modularity and repetition, 5) user-centered design, and 6) flexibility in configuration.

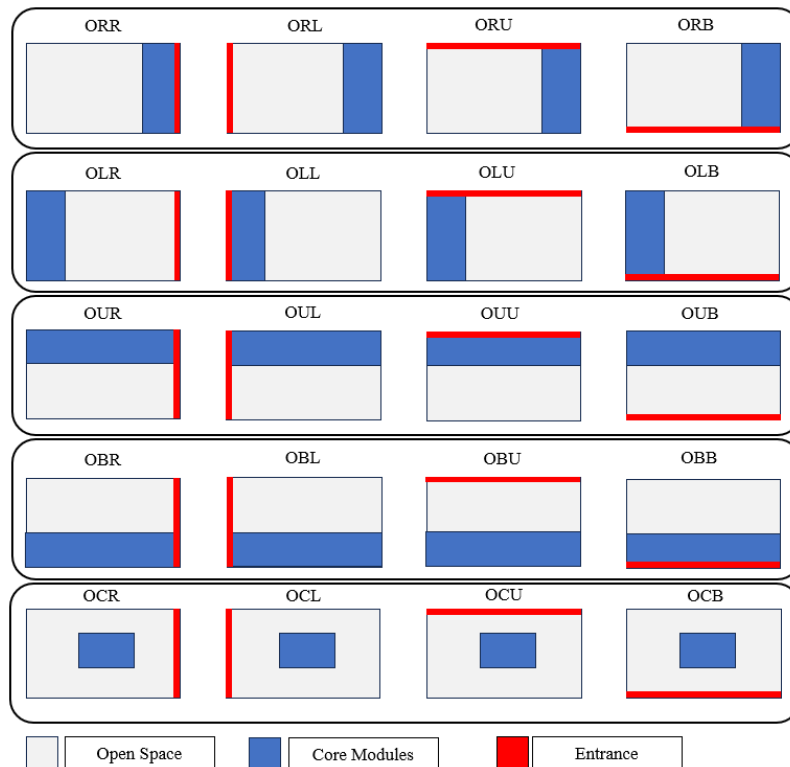


Fig. 2 Core modules configuration based on shape grammar principles

Applying shape grammar principles led to the creation of 20 distinctive floor plan configurations. Each configuration is assigned a unique identifier based on its core module location, represented by a three-letter code. The first letter, "O," consistently denotes an office, while the second and third letters signify the direction of core module and main entrance placement—R (Right), L (Left), U (Upper), B (Bottom), and C (Center). Table 1 shows the unique three letter code generated using the shape grammar principles and Figure 2 shows its corresponding typical configuration.

Table 1: Unique three letters codes generated for office buildings layout using naming systems

No.	Code	Description
1	ORR	Office with Core Modules on the Right, Entrance on the Right
2	ORL	Office with Core Modules on the Right, Entrance on the Left
3	ORU	Office with Core Modules on the Right, Entrance on the Top
4	ORB	Office with Core Modules on the Right, Entrance at the Bottom
5	OLL	Office with Core Modules on the Left, Entrance on the Left
6	OLR	Office with Core Modules on the Left, Entrance on the Right
7	OLU	Office with Core Modules on the Left, Entrance on the Top
8	OLB	Office with Core Modules on the Left, Entrance at the Bottom
9	OUR	Office with Core Modules on Upside, Entrance on the Right
10	OUL	Office with Core Modules on Upside, Entrance on the Left
11	OUB	Office with Core Modules on Upside, Entrance on the Bottom
12	OOU	Office with Core Modules on Upside, Entrance on the Top
13	OBR	Office with Core Modules at the Bottom, Entrance on the Right
14	OBU	Office with Core Modules at the Bottom, Entrance at the upside
15	OBL	Office with Core Modules at the Bottom, Entrance on the Left
16	OBB	Office with Core Modules at the Bottom, Entrance at the Bottom
17	OCL	Office with Core Modules at the Center, Entrance at the Left
18	OCR	Office with Core Modules at the Center, Entrance at the Right
19	OCU	Office with Core Modules at the Center, Entrance at the Upside
20	OCB	Office with Core Modules at the Center, Entrance at the Bottom

The three-letter unique identifier is combined with additional parameters, including design number, building configuration mirroring, and rotation. Rules are established for mirroring and rotation operations. Mirroring options include horizontal (MH), vertical (MV), or simultaneous horizontal and vertical mirroring (MX). Rotation, limited to 90-degree increments in the clockwise direction, is represented by Rx, R1, R2, and R3, corresponding to 0, 90, 180, and 270 degrees, respectively. Figure 3 showcases the final naming convention demonstrating the integration of shape grammar principles and parameters into a coherent and systematic approach for uniquely identifying and categorizing diverse floor plan configurations within the modular office building. Table 2 depicts the naming conventions developed for floor plan with core module to the Right and with different entrance directions.

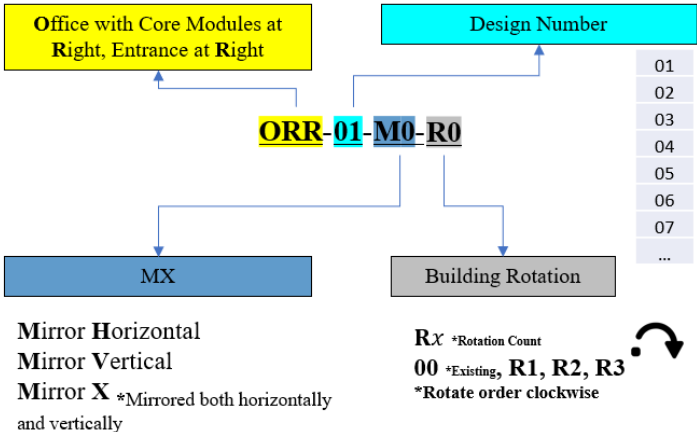


Fig. 3 Final naming convention for office building configuration

Table 2: BIM models attributes corresponding to unique ID generated through naming convention

Unique ID	Land area (sq.m)	Floor area (sq.m)	Number of floors	Gross floor area (sq.m)
ORR-01-M0-00	630	366	12	4386
ORL-01-M0-00	507	327	9	2940
ORU-01-M0-00	455	305	8	2444
ORB-01-M0-00	255	126	7	880

## 2.2 Application in BIM models

The 20 unique office building configurations were translated into BIM models using Autodesk Revit, resulting in diverse floor plan layouts with varying building shapes and areas, as depicted in Figure 4. These BIM models serve as templates for generating new office building configurations. The naming convention, reflecting core module locations in an easily understandable format, facilitates clear communication among project stakeholders, including the client. This system ensures the seamless incorporation of client needs into the templates. The BIM models are exported to IFC files to create a dataset of office building models which will be used in recommendation system in future.

The BIM modeling incorporates modular properties in its configuration and 3D modeling, dividing the model into different modules of sizes (3x9) m and (3x6) m. Core modules, including the staircase, elevator shaft, and entrance, are identified, and their locations are determined using naming conventions. Once a standard configuration is established for a specific area, it can be extended to different area sizes by adding extra modules to one side of the floor plan. This configuration allows for easy fulfillment of the client's area needs by maintaining the same core module locations despite the addition of extra modules.

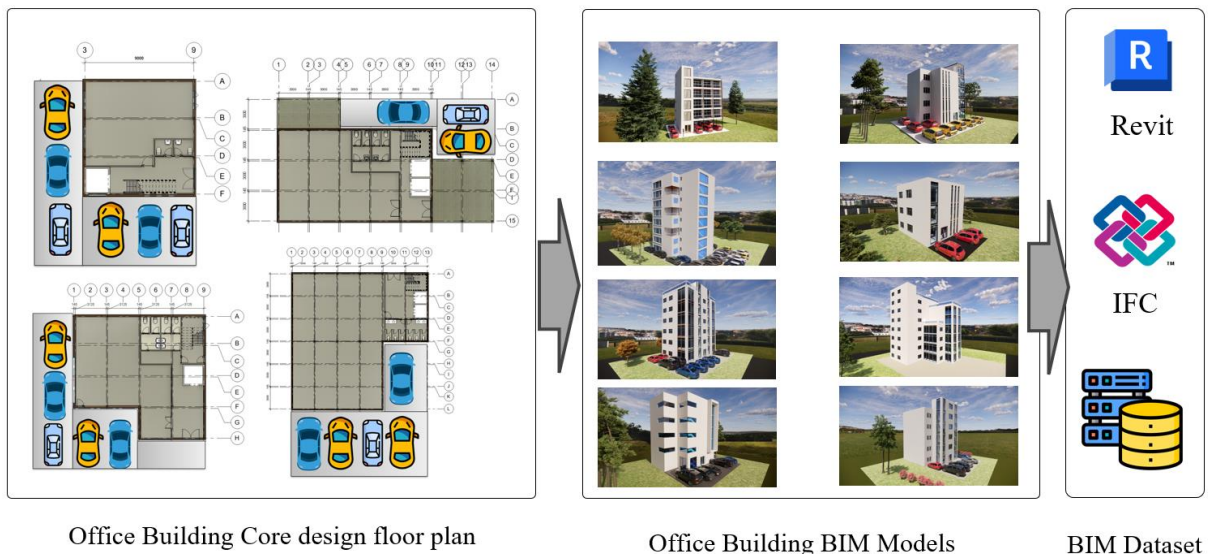


Fig. 4 BIM dataset development

## 3. BIM DATASET UTILIZATION IN RECOMMENDER SYSTEM

The naming convention operates within the BIM database of the recommender system, assigning a unique ID to each BIM model. This unique identifier serves as a representation of the configuration of the BIM model. The use of a unique ID facilitates seamless comparison with the specific requirements of the client, streamlining the recommendation process. Users input their building configuration preferences, and these input values are compared with the BIM database utilizing cosine and Euclidean similarity functions. These functions rank the top three most suitable models from the BIM database. Users can then view the recommended models in both 2D and 3D on the output page, with rendered views enhancing the realism for a more immersive client experience. Figure 5 shows the process of

recommender system for office building design based on client needs.

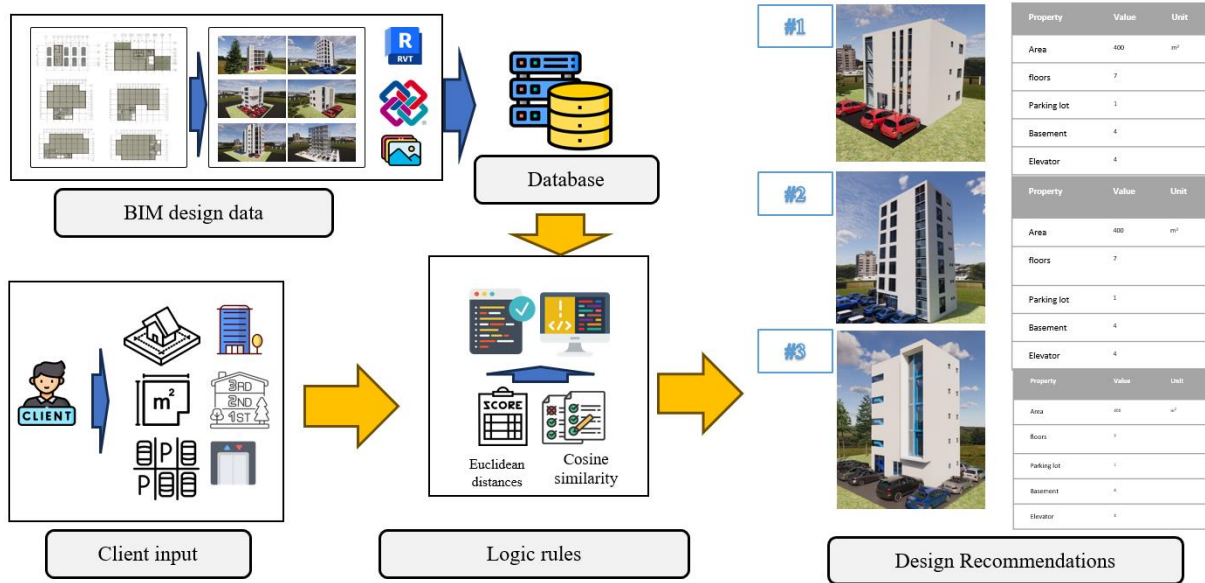


Fig. 5 Process framework of the design recommendation system

Figure 6 shows the user interface for the recommender system in which the client chooses the attributes of building for recommendations. Clients have the flexibility to select various floor plan parameters, including floor area, core module locations, the number of core module locations, the number of floors, and floor area ratio, enabling a tailored and comprehensive customization of their building configurations. It can be seen in the figure that the core module location selection is provided in the user interface which is based on the naming conventions and its value can be automatically determined from the unique ID of the BIM model in the backend.

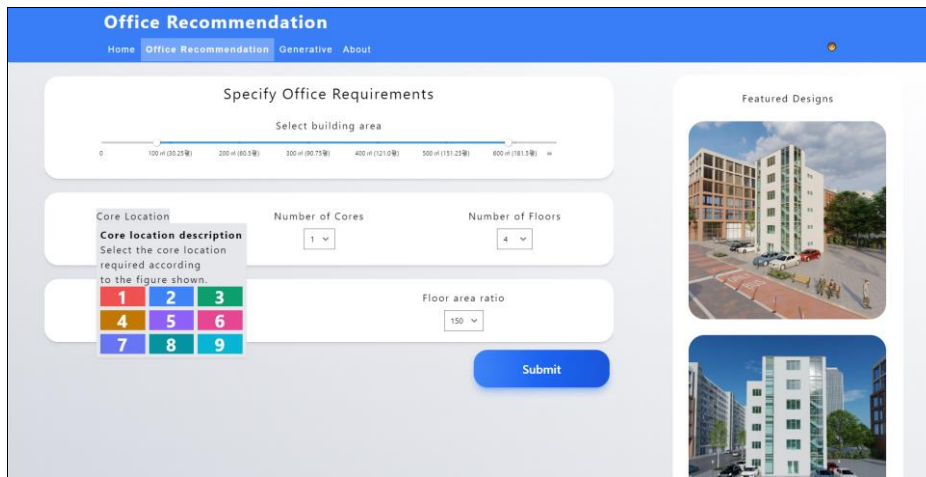


Fig. 6 User interface for the office building recommender system

#### 4. CONCLUSION

This research introduced a BIM-based dataset for modular office buildings using shape grammar principles to manipulate core module locations, resulting in twenty unique configurations. It employs a naming convention based on shape grammar to guide the placement of modules, creating BIM models connected to a recommender system. This system suggests three design options, involving clients directly and enhancing collaboration in the pre-design phase. The developed naming conventions uniquely represent office building floor plan layouts, allowing the creation of distinct IDs for different design configurations. This system is particularly effective for handling big data and large data sets of office buildings. Additionally, it facilitates easy identification of specific models based on client requirements for core module locations, reducing miscommunication between designers and clients. Furthermore, the unique BIM models can serve as templates for developing new office building

configurations. The recommender system helps in enhancing the collaboration of client in the predesign phase which reduces any possible design changes in the future of project execution.

Besides the many contributions and advantages of the BIM dataset and recommender system, there is still more research needed to be carried out. For example, the dataset use for recommender system is not enough to fulfill all the client needs and the recommendation may not match 100% with client needs, so improving the dataset by adding more BIM models can enhance the recommendation system. Moreover, the client needs should be studied through systematic survey to determine what are some needs which the client want in their office building configuration.

## ACKNOWLEDGEMENTS

This work is supported in 2024 by the Korea Agency for Infrastructure Technology Advancement (KAIA) grant funded by the Ministry of Land, Infrastructure and Transport (Grant RS-2021-KA163269).

## REFERENCES

- [1] Norouzi, N., Shabak, M., Embi, M. R. B., & Khan, T. H. (2015). The architect, the client and effective communication in architectural design practice. *Procedia-Social and Behavioral Sciences*, 172, 635-642.
- [2] El-Mahdy, D. (2022). Learning by Doing: Integrating Shape Grammar as a Visual Coding Tool in Architectural Curricula. *Nexus Network Journal*, 24(3), 701-716.
- [3] Taleb, H., Ismail, S., Wahab, M. H., & Rani, W. N. M. W. M. (2017, October). Communication management between architects and clients. In *AIP Conference Proceedings* (Vol. 1891, No. 1). AIP Publishing.
- [4] Van Tam, N., Quoc Toan, N., Phong, V. V., & Durdyev, S. (2023). Impact of BIM-related factors affecting construction project performance. *International Journal of Building Pathology and Adaptation*, 41(2), 454-475.
- [5] Boujaoudeh Khoury, K. (2019). Effective communication processes for building design, construction, and management. *Buildings*, 9(5), 112. <https://doi.org/10.3390/buildings9050112>
- [6] Rehman, S. U., Kim, I., & Choi, J. (2023). Data-driven integration framework for four-dimensional building information modeling simulation in modular construction: a case study approach. *Journal of Computational Design and Engineering*, 10(6), 2288-2311.
- [7] Ajayi, S. O., Oyebiyi, F., & Alaka, H. A. (2023). Facilitating compliance with BIM ISO 19650 naming convention through automation. *Journal of Engineering, Design and Technology*, 21(1), 108-129.
- [8] A Simple BIM Naming Convention Based on ISO 19650 Part 1 - BIMicon. (2024, February 1). A Simple BIM Naming Convention Based on ISO 19650 Part 1 - BIMicon. <https://www.bimicon.com/bim-naming-convention-based-on-iso19650-part1/>
- [9] Ruiz-Montiel, M., Boned, J., Gavilanes, J., Jiménez, E., Mandow, L., & Pérez-De-La-Cruz, J. L. (2013). Design with shape grammar and reinforcement learning. *Advanced Engineering Informatics*, 27(2), 230-245.
- [10] Chen, Y. X., Shu, B., & Chang, H. T. (2023). Exploring Architectural Shapes Based on Parametric Shape Grammars: A Case Study of the “Three Lanes and Seven Alleys” Historic District in Fuzhou City, China. *Buildings*, 13(8), 2063.
- [11] Shekhawat, K., Upasani, N., Bisht, S., & Jain, R. (2020). GPLAN: Computer-Generated Dimensioned Floorplans for given Adjacencies. arXiv preprint arXiv:2008.01803.
- [12] El-Mahdy, D. (2022). Learning by Doing: Integrating Shape Grammar as a Visual Coding Tool in Architectural Curricula. *Nexus Network Journal*, 24(3), 701-716.
- [13] Ruiz-Montiel, M., Boned, J., Gavilanes, J., Jiménez, E., Mandow, L., & Pérez-De-La-Cruz, J. L. (2013). Design with shape grammar and reinforcement learning. *Advanced Engineering Informatics*, 27(2), 230-245.
- [14] Mirahmadi, M., & Shami, A. (2012). A novel algorithm for real-time procedural generation of building floor plans. arXiv preprint arXiv:1211.5842.